



LK-L38 SERIES WATERPROOF ACTUATOR



FEATURE


- DC24V safe voltage
- Protection class IP67, waterproof and dust proof
- Adjustable stroke optional
- Push/Pull force 600N, 1000N or 1500N optional
- Simple but delicacy design, low noise operation
- Sandblasted oxidative surface treatment
- Silver & black standard colors, other colors customized
- Electronic overload cutoff
- Endurance tests (30,000 cycles) are carried out

SPECIFICATION


Specification	Unit	Technical Data
Working Voltage	V	DC24
Max. Current	A	1.5/1.5/2.5
Push/Pull Force	N	600/1000/1500
Travel Distance	mm	50 ~ 600
Travel Speed	mm/s	8 / 4 / 5
Protection Class	IP	67
Working Temperature	°C	-20~+65
Dimension	mm	Φ38*352(372)~902(922)

DIMENSION


LK-L38AY: Stroke is adjustable

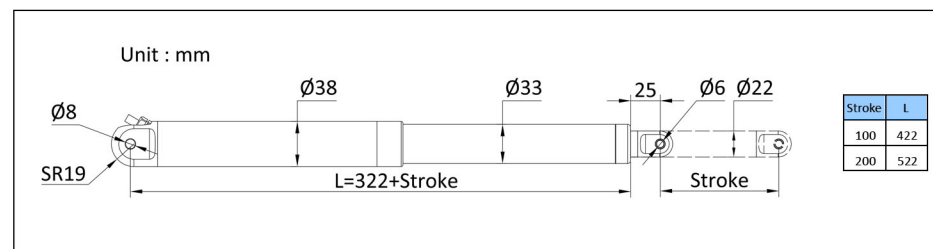


LK-L38AN: Stroke is nonadjustable

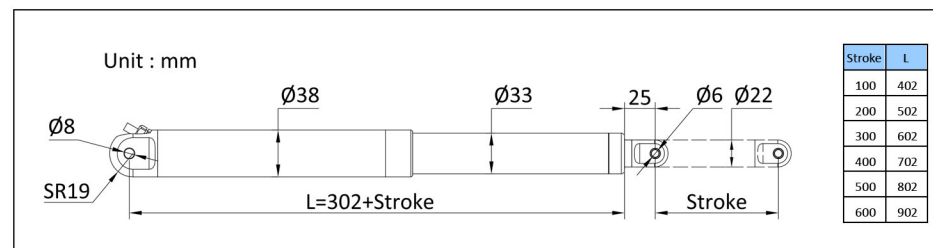


ACCESSORY DESCRIPTION

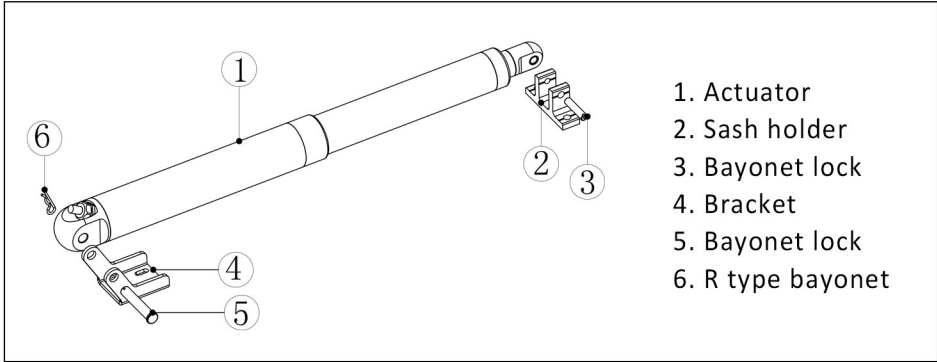


STROKE ADJUSTING

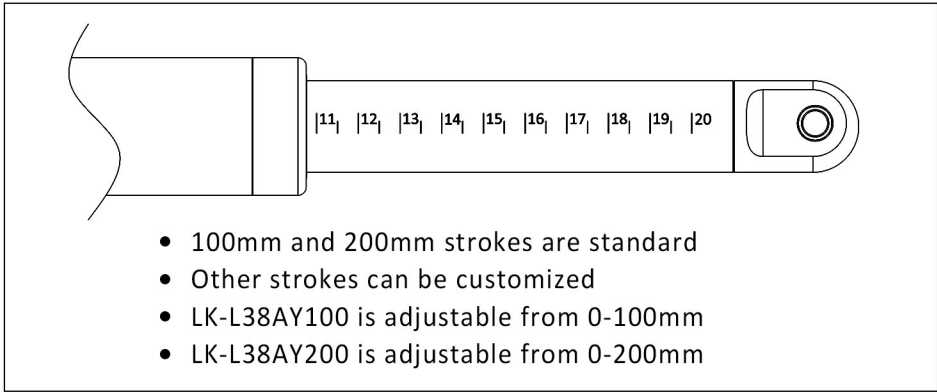

ELECTRIC WIRING

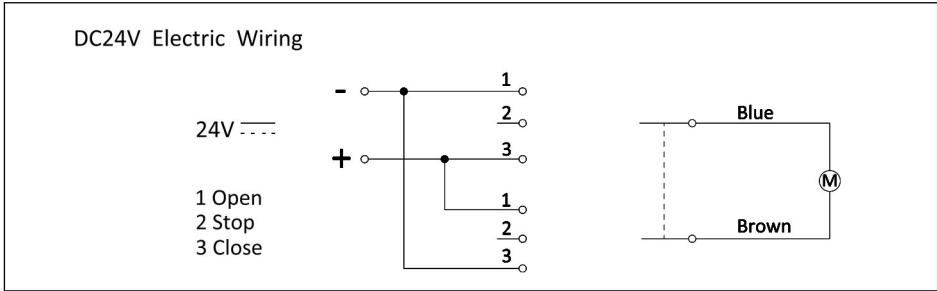

SOLUTION

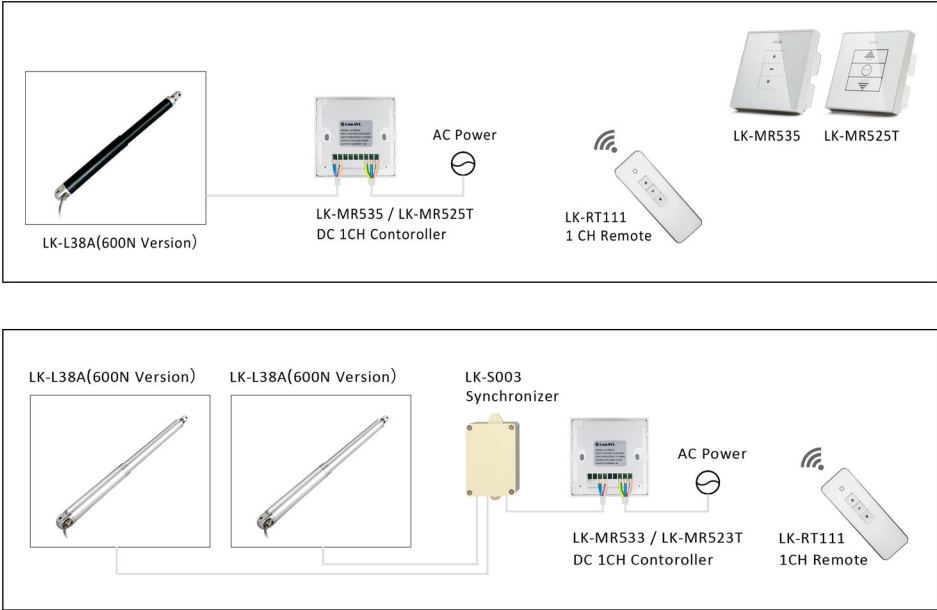

APPLICATION

LK-L38 series linear actuators can be used in smoke and heat removal, outdoor shaded, sun room, medical devices, transportation and industrial automation.

ORDERING KEY

LK - L 38 A Y T 100 S
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

1	2	3	4	5	6	7	8
Brand	Category	Diameter	Wiring	Stroke Adjustable	Load Capacity	Stroke	Color
Linkayl	Linear actuator	38mm	A=wiring from side	Y=Yes N=No	S=600N T=1000N F=1500N	50-600mm	S=Silver B=Black C=Customized