

Conventional Manual Call Point

● Model: LK-SB116

Compatible with all conventional Fire alarm control panels

Pull Down plate

Safe and easy to press in emergency condition

Reset by Key

Can be reset by a special included key



General Description

The conventional manual call point is designed for conventional fire alarm system to report fire or emergency condition by pressing its breakable glass. The manual call point can be tested by a test key without breaking the glass.

Features and Benefits


- Compatible with all the conventional fire alarm control panels
- Can be reset by key
- 470 Ohm resistance
- Easy surface mounting base included

Conventional Manual Call Point

Installation Guidelines

All wiring must be installed in compliance with the National Electrical Code, applicable state and local codes, and any special requirements of the local Authority Having Jurisdiction.

Figure 1. Dimension of manual call point

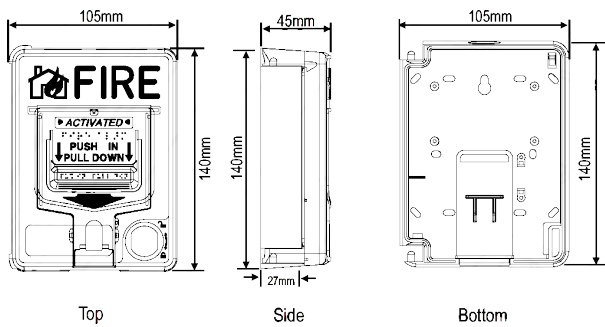


Technical Specifications

Dimension: 140mmX105mm
Height: 45 mm
Weight: 220 g
Operating Temperature Range: -10°C to 50°C
Operating Humidity Range: 10% to 93% Relative Humidity, Noncondensing
Latching Alarm: Reset by momentary power interruption

Electrical Ratings

System Voltage (nominal): 24 VDC (9V- 28VDC)
Standby Current: 60 µA @ 24VDC
Alarm Current: 10-30 mA @ 24VDC

Figure 2. Wiring diagram of the manual call point

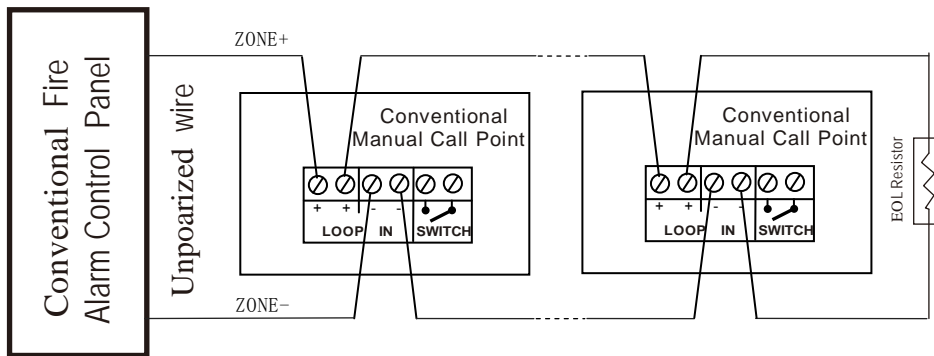

Ordering Information

Model	Pack Quantity	Dimensions	Weight
LK-SB116	Individual(1 units)	140x105x45	220g