

# LK-MS542 Manual Switch



LK-MS542-1

LK-MS542-2


## Feature

- Suitable for controlling tubular motor, electric window opener, automatic door closer
- Can control AC motor, DC motor, work with controller to control actuator as well
- Special contact materials with a maximum carrying current of up to 10A
- Double-pole double-throw three-position switch to control motor Forward/Stop/Reverse
- LK-MS542-R is self-resetting switch. When the button is pressed, and after the release, the button rebounds and the circuit is disconnected
- LK-MS542-L is self-locking switch. when presses the button, the button does not rebound after being released, and the circuit is continuously turned on
- Single or double channel control, standard 86 type, easy for installation


## Ordering code

Model	Channel	Reboundable	V <sub>in</sub> (VAC)	I <sub>max</sub> (A)	Temp(°C)	Size(mm)
LK-MS542-1R	1	Yes	100-240	10	-20~+55	86*86*35
LK-MS542-1L	1	No	100-240	10	-20~+55	86*86*35
LK-MS542-2R	2	Yes	100-240	10	-20~+55	86*86*35
LK-MS542-2L	2	No	100-240	10	-20~+55	86*86*35

## Contact signal control

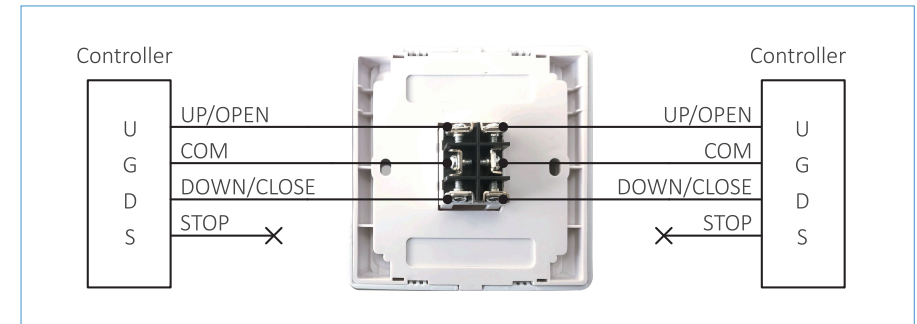

## AC motor control

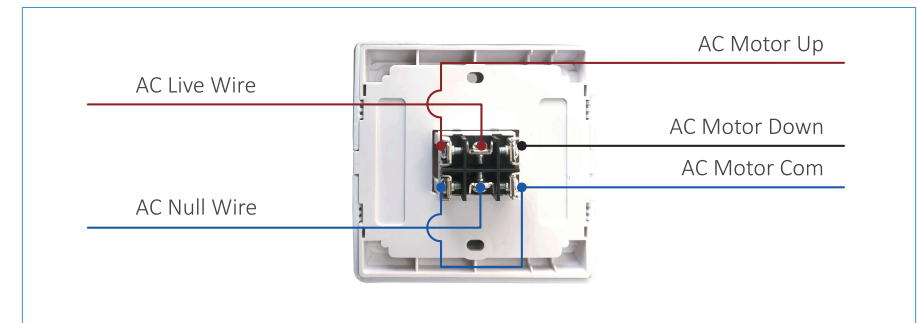

## DC motor control

