


LK-SB106 Manual Call Point



Solution



Dimension

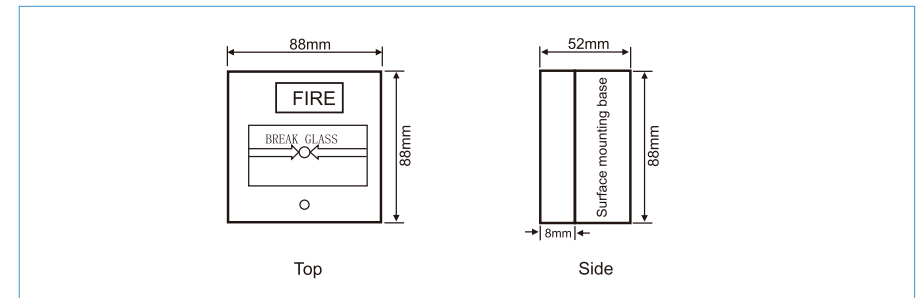

Feature

- Designed for conventional fire alarm system to report fire or emergency condition by pressing its breakable glass
- Compatible with all the conventional fire alarm control panels
- Can be tested by a test key without breaking the glass
- Can be reset by key
- 470 Ohm resistance
- Easy surface mounting base included

Ordering code

Model	Vin	Standby Current	Alarm Current	Size
LK-SB106	9-28VDC	60µA@24VDC	10~30 mA @ 24VDC	88*88*52mm

Wiring diagram

